

IM-130APE

Cuber, Modular

Production Capacity (kg/24h) approx. (AT 10°C, WT 10°C): 125



PRODUCT SERIES: IM CUBE ITEM NUMBER: M117 COUNTRY OF ORIGIN: UK

Hoshizaki IM-130APE Cube model is a modular ice maker producing up to 125 kg of cube ice per 24 hours. This model is compatible with our storage bins.

Ice cube dimensions and weight - disclaimer: The drawing is for illustration purposes only. Cube size and weight may be differ due to local installation conditions.

- Ice making system with an automatic rinse cycle
- Each ice cycle is made with fresh water
- Closed water circuit for contamination protection
- Closed Cell System helps produce compact, hard and geometrically perfect ice
- Easy external access to control panel
- System comes with a magnetic DC water pump with variable speed and that has no direct coupling, which prevents any leakage
- UV-C sanitization function is retrofittable
- Cleanable air filter
- Stainless steel frame inside
- Easily removable water pan assembly

ICE TYPE: Large cubes, Standard



ACCESSORIES INCLUDED

Scoop, installation kit, ice chute

OPTIONAL ACCESSORIES

4HC-H water filtration

CORRESPONDING WATER FILTERS

4HC-H Twin Water Filter, 4HC Replacement Cartridge

CORRESPONDING BIN(S)

B-140SA, B-210SA, B-340SA

CORRESPONDING TOP KITS

TK-30 for B-140SA, B-210SA, B340SA (optional, not required), TK-8D for B-210SA, TK-8D + TK18D for B-340SA

WARRANTY PERIOD 3 Years on Parts & Labour based on country agreement EXTERIOR Stainless steel AISI 430, Galvanized steel (Rear)

Refrigerant: R290 / Refrigerant (kg): 0.13 / CO2 equivalent (kg): 0.39

OPERATING CONDITIONS

Ambient Temp.: 1-40°C, Water Supply Temp.: 5-35°C, Water Supply Pressure: 0.07-0.8MPa (0.7-8bar), Voltage Range: Rated Voltage ±6%


CERTIFICATIONS




Hoshizaki Europe B.V. Burgemeester Stramanweg 101 1101 AA Amsterdam The Netherlands HEBV Amsterdam office T. +31 (0)20 691 8499 Export line direct T. +31 (0)20 565 0429 sales.ex@hoshizaki-europe.com service.ex@hoshizaki-europe.com www.hoshizaki-europe.com



IM-130APE



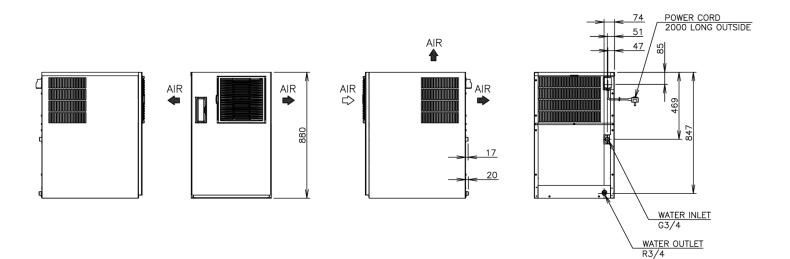

TECHNICAL SPECIFICATIONS

0,	Production Capacity (kg/24h) approx. (AT 10°C, WT 10°C)	(kg/24h) approx.	(kg/24h) approx.	,	Electrical Circuit Breaker Protection (A)	Consumption (kW)	Water Consumption (m3/24h) approx. (AT 10°C WT 10°C)	32°C, WT 21°C)
Air Cooled	125	110	95	1/220 - 240V/50Hz	5	0.58	0.52	1.38

SHIPPING SPECIFICATIONS

Dimensions W x D x H (mm)	Net Weight (kg)	Dimensions, Packed, W x D x H (mm)	Gross Weight, Packed (kg)	Volume Packed (m3)	
560 x 700 x 880	68	665 x 820 x 1054	79	0.575	

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice. Please observe: Water cooled units should have the condenser circuit connected to a self-contained recirculating system. It is likely that the connection of such units to the mains water supply may be a contravention of local water authority by-laws.



Hoshizaki Belgium Hoshizaki Danmark Hoshizaki Deutschland Hoshizaki France Hoshizaki Iberia Hoshizaki Italia Hoshizaki Middle East info@hoshizaki.be info@hoshizaki.dk vertrieb@hoshizaki.de info@hoshizaki.fr info@hoshizaki.es commerciale@hoshizaki.it sales.ex@hoshizaki-europe.com Hoshizaki Netherlands Hoshizaki Norge Hoshizaki Sverige Hoshizaki UK Export countries Other countries info@hoshizaki.nl salg@hoshizaki.no orderSE@hoshizaki.dk uksales@hoshizaki.uk sales.ex@hoshizaki-europe.com sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com